Technical Information



8025A WOODEN SET



Technical data:


Dimensions	4,35 x 2,55 m
Safe zone	7,15 x 5,65 m
Total height	2,1 m
Free fall height	1,95 m
Age	3+
Conformity with PN-EN 1176	YES
Platform	1x 1,2 m
Slide	1x 1,2 m



Technical Information



8025A WOODEN SET

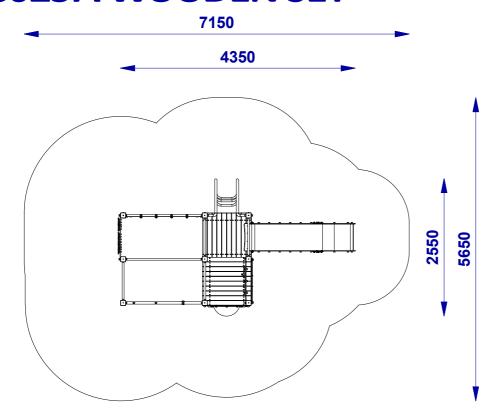

Set contents:			
Module:	Qty:		
101.04 DN_W4_1200	1		
101.43 DN_W2_1000	1		
103.02 DN_B_BUL	1		
103.12 DN_B_PS	1		
103.21 DN_PKIK	1		
115.03 DN_LWSP_1200	1		
116.04 DN_SL_1200	1		
119.01 DN_SKL	1		
125.03 DN_DL_1200	1		
128.02 DN_MSZ_1200	1		
130.02 DN_WO_1000	1		
130.03 DN_WO_1200	1		
164.07 DN_WWP_1800	1		

Galvanized and powder coated steel				
Construction	Stainless steel			
	Square 90x90 glued laminated timber, impregnated	√		
Connectors	Stainless and galvanized			
Decorative elements	Polyethylene plastic (HDPE)	√ ✓		
	Polycarbonate (PC)			
	Hardwood plywood painted with certified chalkboard paint			
Metal	Galvanized and powder coated steel	√		
elements	Stainless steel			
	Stainless steel with polyethylene plastic (HDPE)	√		
Slide	Whole polyethylene plastic (LLDPE)			
	Whole stainless steel			
Ropes	Polypropylene rope with steel core	√		
Rope connectors	Aluminum and polyamide	√		
Caps	Polyamide			
Dietferme	Polyethylene plastic (HDPE) with antiskid layer			
Platforms	Grooved board made of solid wood	√		
Anchoring	Construction elements - 800 mm in ground			
	Powder coated steel post - 800 mm in ground	√		
Chain	Stainless steel			
	Galvanized steel			
Slings	Stainless steel with bearings			
	Flat with aluminum core, covered with rubber, certified			
Seats	Bucket with aluminum core, covered with rubber, certified			
	Rope "Birds nest" with metal core, certified			
Spring	20 x 200 x 400 mm - certified			

 $\label{proposal} \mbox{Proposal visualisation. Colors can be different. Ask for available options.}$

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing surfaces.				
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]	
Turf	-	-	≤1000	
Bark	20 - 80	200	≤2000	
Вагк		300	≤3000	
Wood chips	5 - 30	200	≤2000	
		300	≤3000	
Sand 0,2 - 2	200	≤2000		
	0,2 - 2	300	≤3000	
Gravel	2 - 8	200	≤2000	
		300	≤3000	
Other	as tested to HIC (see EN 1177)		as tested	

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).