### **Technical Information**



# •8042B ICELAND SET



#### • Technical data:


Dimensions	7,05 x 5,85 m	
Safe zone	10,05 x 8,9 m	
Total height	3,1 m	
Free fall height	1,6 m	
Age	3+	
<b>Conformity with PN-EN 1</b>	176 YES	
Platform	4x 1,0 m	
Slide	2x 1,0 m	



## **Technical Information**



# 8042B ICELAND SET

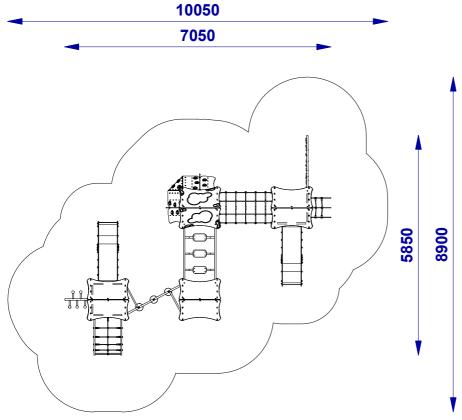

Set contents:		
Modułe:	Qty:	
201.23 SN_W4D2_1000	4	
202.01 SN_D2	4	
203.01 SN_B	3	
206.04 SN_WWA3_1000	1	
207.02 SN_WK_1000	1	
209.02 SN_WLL_1000	1	
210.06 SN_WLA_1000	1	
216.01 SN_MOS	1	
218.03 SN_MGL_1000	1	
219.0 SN_TL	1	
224.03 SN_SL_1000	2	
227.01 SN_PRL	1	
228.08 SN_DWS_1000_S	2	

	Galvanized and powder coated steel	✓
Construction	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	<b>√</b>
Decorative	Polyethylene plastic (HDPE)	<b>√</b>
elements	Polycarbonate (PC)	
	Hardwood plywood painted with certified chalkboard paint	
Metal	Galvanized and powder coated steel	<b>√</b>
elements	Stainless steel	<b>√</b>
	Stainless steel with polyethylene plastic (HDPE)	<b>√</b>
Slide	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Ropes	Polypropylene rope with steel core	<b>√</b>
Rope connector	Aluminum and polyamide	<b>√</b>
Caps	Polyamide	<b>√</b>
Platforms	Polyethylene plastic (HDPE) with antiskid layer	<b>√</b>
	Grooved board made of solid wood	
Anchoring	Construction elements - 800 mm in ground	<b>√</b>
	Powder coated steel post - 800 mm in ground	
Chain	Stainless steel	
	Galvanized steel	
Slings	Stainless steel with bearings	
	Flat with aluminum core, covered with rubber, certified	
Seats	Bucket withaluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	
	•	

Proposal visualisation. Colors can be different. Ask for available options.

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark 20 - 80	20 90	200	≤2000
	20 - 60	300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand 0,2 - 2	200	≤2000	
	0,2 - 2	300	≤3000
Gravel	2 - 8	200	≤2000
		300	≤3000
Other as tested to HIC (see EN 1177)		as tested	

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).