

# •8304B METAL SET



#### • Technical data:

Dimensions	4,45 x 3,4 m
Safe zone	6,95 x 6,4 m
Total height	4,0 m
Free fall height	1,4 m
Age	3+
<b>Conformity with PN-EN</b>	1176 YES
Platform 1x 1,4 m; 1x 1,2 n	
Slide	1x 1,4 m




## www.newplay.com.vn

## page 1 of 2



# **8304B METAL SET**

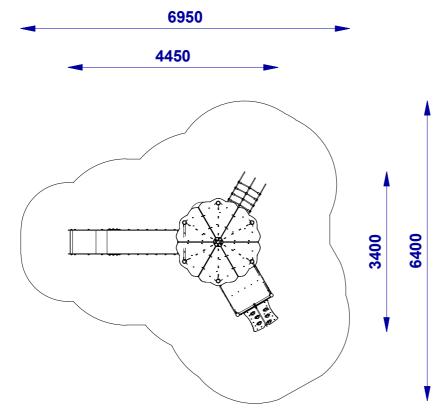

Set contents:		
Module:	Qty:	
0010.0101 LM_B_K	2	
0010.0102 LM_B_BUL	1	
0010.0103 LM_B_PKL	1	
0010.0104.1400 LM_B_PSU_1400	1	
201.105 SN_W6D6_1400	1	
201.44 SN_W2_1200	1	
202.07 SN_D6	1	
203.20 SN_B_PLOT_P	1	
205.07 SN_WWA_1200	1	
210.08 SN_WLA_1400	1	
224.05 SN_SL_1400	1	
231.05 SN_SKLP	1	
267.01 SN_SDP	1	

	Galvanized and powder coated steel	$\checkmark$
Construction	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	$\checkmark$
Decorative elements	Polyethylene plastic (HDPE)	$\checkmark$
	Polycarbonate (PC)	
	Hardwood plywood painted with certified chalkboard paint	
Metal	Galvanized and powder coated steel	$\checkmark$
elements	Stainless steel	$\checkmark$
Slide	Stainless steel with polyethylene plastic (HDPE)	$\checkmark$
	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Ropes	Polypropylene rope with steel core	$\checkmark$
Rope connectors	Aluminum and polyamide	$\checkmark$
Caps	Polyamide	
Platforms	Polyethylene plastic (HDPE) with antiskid layer	$\checkmark$
	Grooved board made of solid wood	
Anchoring	Construction elements - 800 mm in ground	$\checkmark$
	Powder coated steel post - 800 mm in ground	
Chain	Stainless steel	
	Galvanized steel	
Slings	Stainless steel with bearings	
Seats	Flat with aluminum core, covered with rubber, certified	
	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Pork	Bark 20 - 80	200	≤2000
Dark		300	≤3000
Wood chips 5 - 30	5 30	200	≤2000
	300	≤3000	
Sand 0,2 - 2	02-2	200	≤2000
	300	≤ <b>3000</b>	
Gravel 2 -	2-8	200	≤2000
	2-0	300	≤ <b>3000</b>
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).

page 2 of 2

Proposal visualisation. Colors can be different. Ask for available options

### www.newplay.com.vn