

• 10049 WOODEN SET





Technical data:


Dimensions	8,2 x 6,95 m
Safe zone	11,2 x 9,45 m
Total height	3,0 m
Free fall height	1,0 m
Age	1+
Conformity with PN-EN 1176	YES
Platform 1x 1,0 m; 1x 0,8 n	n; 1x 0,6 m; 1x 0,4 m
Slide	1x 1,0 m; 1x 0,6 m



Technical Information



• 10049 WOODEN SET

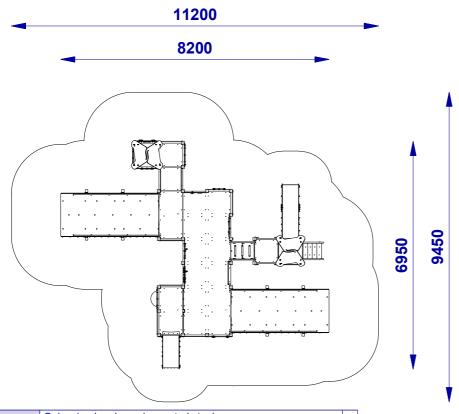

Set contents:	
Module:	Qty:
640.S.HD.001 BP_WKL	9
640.S.HD.002 D2_S	2
640.S.HD.008 BO	2
640.S.HD.009 BBUL	1
640.S.HD.010 KIK	1
640.S.HD.014 BS	1
640.S.HD.015 BKL	1
640.S.HD.017 BSP	1
640.S.HD.018 BPR	1
640.S.HD.019 BZ	1
640.S.HD.021 BPKN	1
640.S.HD.025 BMAT	1
640.S.P.009.0400 MBHK_400	1
640.S.W.003.00600 SL_600	1
640.S.W.003.01000 SL_1000	1
640.S.W.007.01000 SCH_HD_1000	1
640.S.W.012.00800 DWS_800	2
640.S.W.017.01 WOO	1
640.S.W.020.00400 TWI_400	2
640.S.WD.001.00400 W4D_400	1
640.S.WD.001.01000 W4D_1000	1
640.S.WD.002.00400 W4_400	16
640.S.WD.002.00600 W4_600	2
640.S.WD.002.00800 W4_800	1

Galvanized and powder coated steel			
Stainless steel			
Square 90x90 glued laminated timber, impregnated	√		
Stainless and galvanized			
Polyethylene plastic (HDPE)			
Polycarbonate (PC)			
Hardwood plywood painted with certified chalkboard paint	√ ✓		
Galvanized and powder coated steel			
Stainless steel	√		
Stainless steel with polyethylene plastic (HDPE)	√		
Whole polyethylene plastic (LLDPE)			
Whole stainless steel			
Polypropylene rope with steel core			
Aluminum and polyamide			
Polyamide			
Polyethylene plastic (HDPE) with antiskid layer			
Anti-slip and waterproof plywood	√		
Construction elements - 800 mm in ground			
Powder coated steel post - 800 mm in ground	√		
Stainless steel			
Galvanized steel			
Stainless steel with bearings			
Flat with aluminum core, covered with rubber, certified			
Bucket with aluminum core, covered with rubber, certified			
Rope "Birds nest" with metal core, certified			
20 x 200 x 400 mm - certified			
	Stainless steel Square 90x90 glued laminated timber, impregnated Stainless and galvanized Polyethylene plastic (HDPE) Polycarbonate (PC) Hardwood plywood painted with certified chalkboard paint Galvanized and powder coated steel Stainless steel Stainless steel with polyethylene plastic (HDPE) Whole polyethylene plastic (LLDPE) Whole stainless steel Polypropylene rope with steel core Aluminum and polyamide Polyamide Polyethylene plastic (HDPE) with antiskid layer Anti-slip and waterproof plywood Construction elements - 800 mm in ground Powder coated steel post - 800 mm in ground Stainless steel Galvanized steel Stainless steel with bearings Flat with aluminum core, covered with rubber, certified Bucket with aluminum core, covered with rubber, certified Rope "Birds nest" with metal core, certified		

 $\label{proposal} \mbox{Proposal visualisation. Colors can be different. Ask for available options.}$

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing surfaces.				
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]	
Turf	-	-	≤1000	
Bark 20 - 80	200	≤2000		
	20 - 60	300	≤3000	
Wood chips	5 - 30	200	≤2000	
		300	≤3000	
Sand 0,25 - 8	0.25 - 8	200	≤2000	
	0,23 - 0	300	≤3000	
Gravel 0,	0,25 - 8	200	≤2000	
	0,23 - 0	300	≤3000	
Other as tested to HIC (see EN 1177)		as tested		

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).